


TBC series(50,100,150A)

TBC -50 -683

① ② ③



RoHS

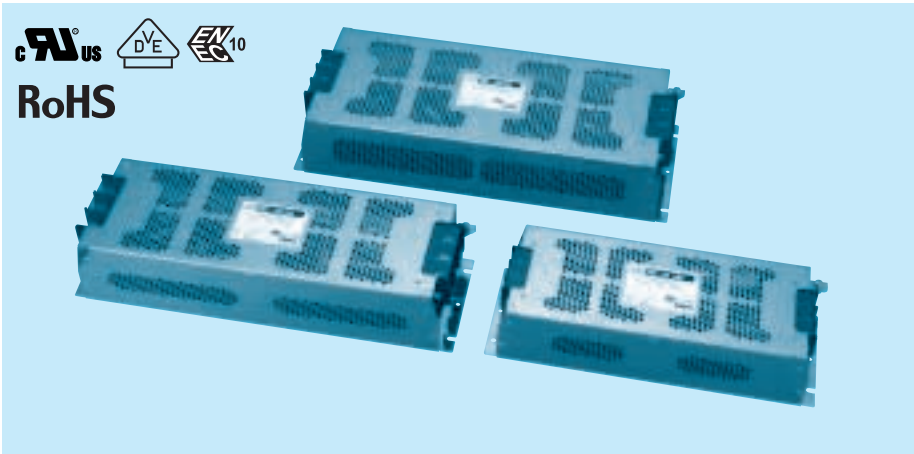

- ① Model Name
- ② Rated Current
- ③ Line to ground capacitor code: See table 1.1.

table 1.1 Line to ground capacitor code

Code	Leakage Current (Input 250/500V 60Hz)	Line to ground capacitor (nominal value)
223	1.0mA/2.0mA max	22,000pF
683	2.5mA/5.0mA max	68,000pF
104	3.5mA/7.0mA max	100,000pF

Features of TBC series


High-attenuation type of common mode noise from 150kHz to 1MHz (2-stage filter)

- Three phase rated voltage 500 VAC (voltage range:528V max)
- Selectable leakage current value


Specifications

No.	Items	TBC-50-683	TBC-100-683	TBC-150-683
1	Rated Voltage[V]	AC Three Phase 500 (voltage range:528 max)		
2	Rated Current[A]	50	100	150
3	Test Voltage (Terminal-Mounting Plate)	2,500 VAC (Cutoff Current = 100mA), 1minute at room temperature and humidity		
4	Isolation Resistance (Terminal-Mounting Plate)	500 VDC 100MΩ min at room temperature and humidity		
5	Leakage current 250/500V 60Hz	2.5mA/5.0mA max		
6	DC resistance	14mΩ max	8mΩ max	6mΩ max
7	Safety agency approval temperatures	-25 to +85°C (Refer to Derating Curve)		
8	Operating temperature	-40 to +85°C (Refer to Derating Curve)		
9	Operating humidity	20 to 95%RH (Non condensing)		
10	Storage temperature/humidity	-40 to +85°C/20 to 95%RH (Non condensing)		
11	Vibration	10 to 55Hz, 19.6m/s ² (2G), 3min. Period, 1hour each X, Y and Z axis		
12	Impact	196.1m/s ² (20G), 11ms Once each X, Y and Z axis		
13	Safety agency approvals	UL1283, CSA C22.2 No.8 (C-UL) , DIN EN60939 VDE0565 Teil3-1, ENEC		
14	Case size (without projection)	140 X 80 X 374 mm (W X H X D)	150 X 92 X 456 mm (W X H X D)	190 X 92 X 482 mm (W X H X D)
15	Mass	4.3kg max	7.7kg max	9.6kg max

Circuit Diagram

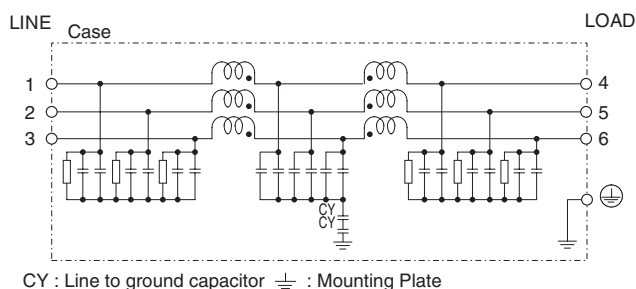


Derating Curve

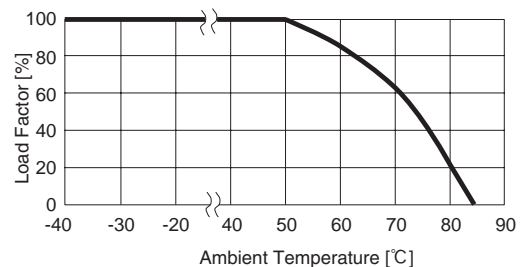

* Keep free ventilation holes for cooling.

External view


TBC-50-□□□

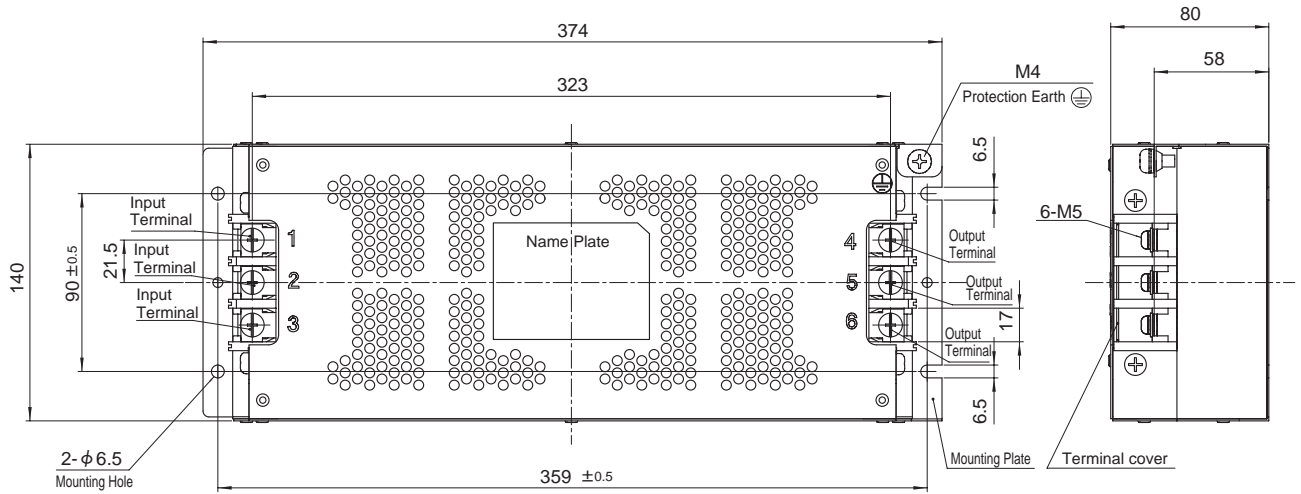

※ Can not be mounted upside-down.

- ※ Tolerance : ± 1
- ※ Mass : 4.3kg or less
- ※ Chassis Material : Stainless steel $t=1.0$
- ※ Dimensions in mm
- ※ Terminal block screw tightening torque M5:3.0N · m (30.7kgf · cm) max
- ※ Protection Earth screw tightening torque M4:1.6N · m (16.9kgf · cm) max

TBC-100-□□□

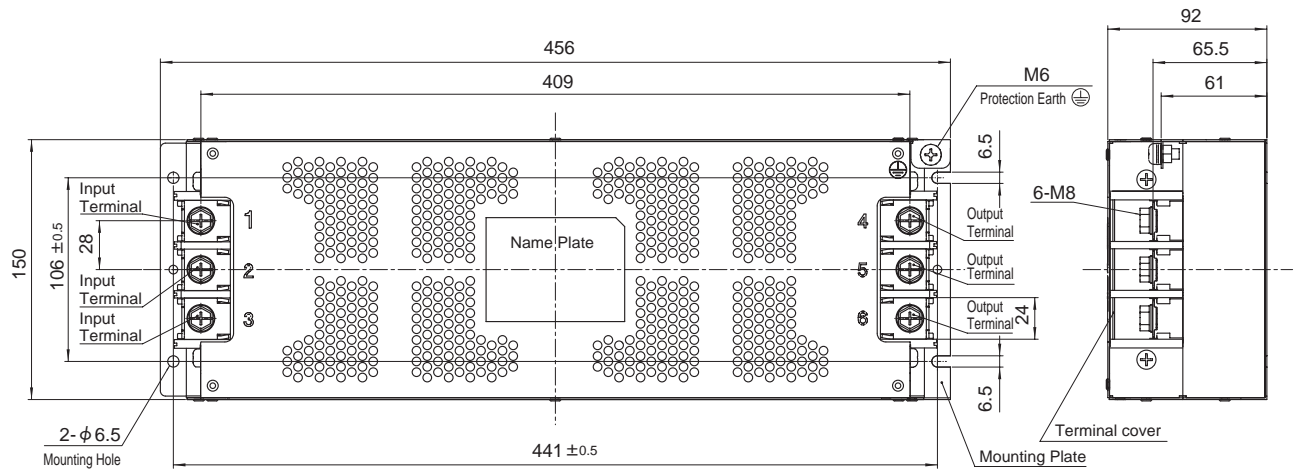


※ Can not be mounted upside-down.

- ※ Tolerance : ± 1
- ※ Mass : 7.7kg or less
- ※ Chassis Material : Stainless steel $t=1.0$
- ※ Dimensions in mm
- ※ Terminal block screw tightening torque M8:9.2N · m (93.9kgf · cm) max
- ※ Protection Earth screw tightening torque M6:5.8N · m (59.2kgf · cm) max

External view

TBC-150-□□□

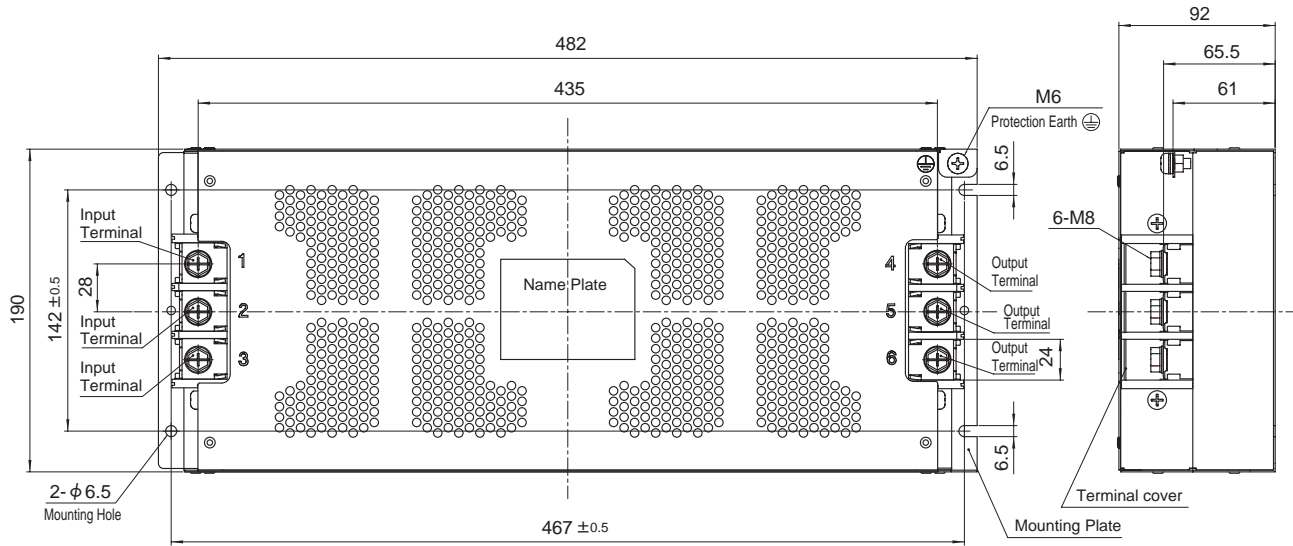

※ Can not be mounted upside-down.

- ※ Tolerance : ±1
- ※ Mass : 9.6kg or less
- ※ Chassis Material : Stainless steel t=1.0
- ※ Dimensions in mm
- ※ Terminal block screw tightening torque M8:9.2N · m (93.9kgf · cm) max
- ※ Protection Earth screw tightening torque M6:5.8N · m (59.2kgf · cm) max